


Oscilloscope

ST-16A

HTCTM
INSTRUMENTS

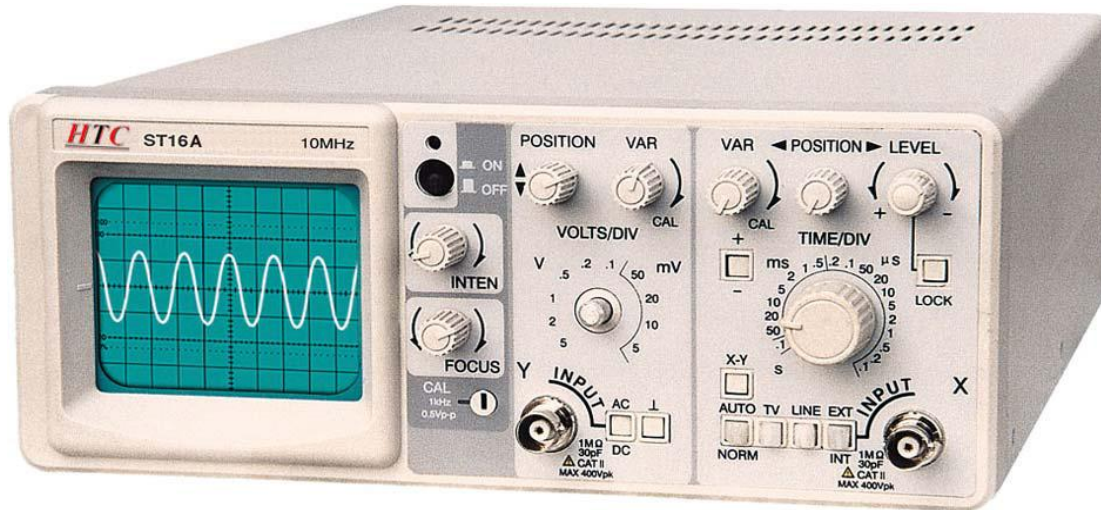

Specification:

- **Band Width** : DC ~ 10MHz (3db)
- **Y Deflection** : 10mV / div ~ 5V / div 1-2-5 step $\pm 5\%$
- **Sweep Rate** : 200ms/ div-0.5us / div 1-2-3 step $\pm 5\%$
- **Trig Source** : Int., Ext.
- **X Sensitivity** : 0.5V / div, $\pm 5\%$,MAG 0.1V/div, $\pm 10\%$
- **Trig Mode** : Int. ≥ 1 div ,Ext. ≥ 0.5 Vp-p
- **Wave** : Rectangle
- **Amplitude** : 0.5V $\pm 2\%$
- **Frequency** : 1kHz $\pm 3\%$

Feature:

- Digital-code sweep switch
- Height Y Sensitivity
- Power Supply : AC 200 $\pm 10\%$ V

- **Standard Accessory** : Power Chord, 20MHz Oscilloscope Probe, Manual
- **Dimensions** : 91 x 255 x 290mm